

3 SDM BOREHOLE RANGE

3"



Applications

For water supply from boreholes, wells or reservoirs
Continues duty rated products for use in domestic,
farming and irrigation applications.

Operating Conditions

Maximum fluid temperature up to + 35 °C
Maximum sand content: 0.25%
Minimum well diameter: 3"

Motor and Pump

Replaceable Pump and Motor.
Single-Phase: 220 - 240V/50Hz
Equipped with start control box or digital
auto-control box.
Curve tolerance according to ISO 9906

Warranty: 1 year

(according to our general sales conditions)




Components	Material
Pump external casing	AISI 304 SS
Delivery casing	Cast-Cu ASTM C85500
Suction lantern	Cast-Cu ASTM C85500
Diffuser	Plastic.PC
Impeller	Plastic.POM
Shaft	AISI 304 SS
Shaft coupling	AISI 304 SS
Wear ring	AISI 304 SS
Motor external casing	AISI 304 SS
Top chock	①Cast-Cu ASTM C85500 ②Cast-iron ASTM NO.30
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well(Graphite-Ceramic/TC)
Shaft	AISI 304 SS-ASTM 5140
Bearing	NSK
Seal lubricant oil	Oil for food machinery and pharmaceutic use.

3SD(M) 2 / 8(N)

built-in capacitor
(outboard capacitor with no N marked)
impeller's number
capacity (m³/h)
single phase
(three phase with no M marked)
pump name
well Ø 3"

3 SDM 1.8

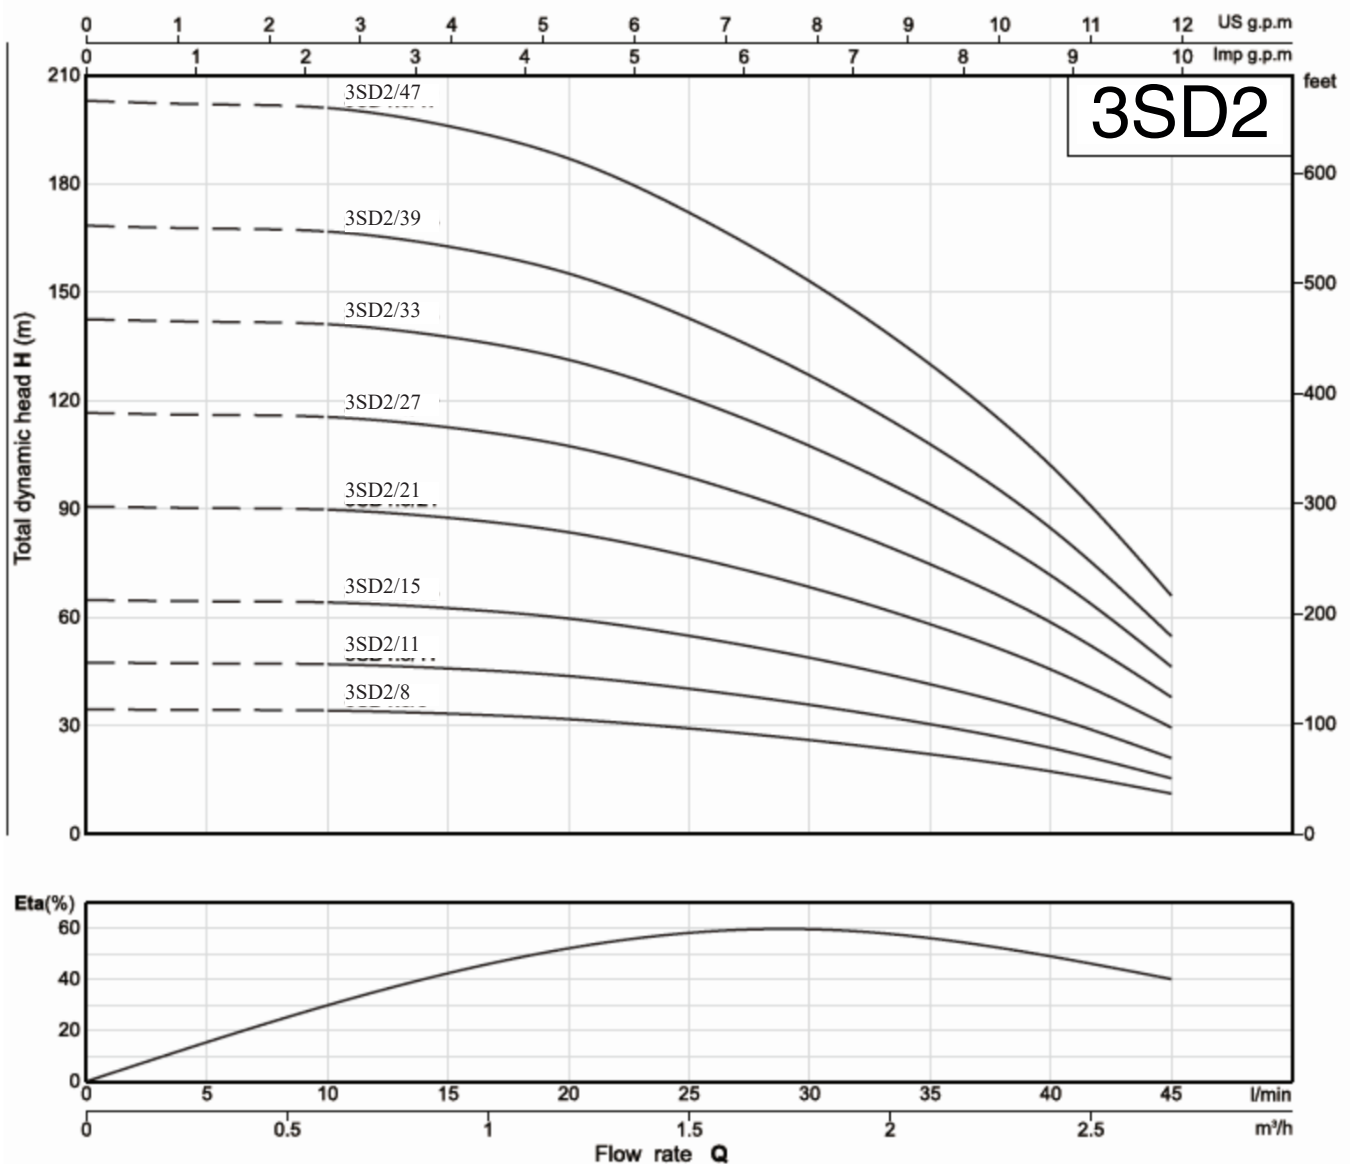

Performance Data 50 Hz

VERSION		MODEL	P2		CAP µf	DELIVERY										
1*	2**	3 ~ 380-415V	kW	HP		m3/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7
						l/min	0	5	10	15	20	25	30	35	40	45
✓	✓	3SDM2/8	0.18	0.25	16	Head (m)	35	34	34	33	32	29	26	22	17	11
✓	✓	3SDM2/11	0.25	0.39	16		48	47	47	46	44	40	36	30	24	15
✓	✓	3SDM2/15	0.37	0.5	20		65	64	64	63	60	55	49	41	33	21
✓	✓	3SDM2/21	0.55	0.75	25		91	90	90	88	84	77	68	58	46	29
✓	✓	3SDM2/27	0.75	1	35		117	116	115	113	107	99	88	75	59	38
✓		3SDM2/33	1.1	1.5	45		143	142	141	138	131	121	107	91	72	46
✓		3SDM2/39	1.1	1.5	45		168	168	167	163	155	143	127	108	85	55
✓		3SDM2/47	1.5	2	55		203	202	201	196	187	172	153	130	102	66

* Version 1 Pump, Motor & Control Box


** Version 2 Pump, Motor, Control Box, Base plate, Cable (length - refer pricelist), Joint & Rope.

Note: Unit c/w maximum 1.5mm 4 core cable.

However, it is not recommended for use for lengths longer than 60m.



For applications where longer distances are required it is advised to purchase the Version 1 kit. Refer to the 3" & 4" Borehole Catalogue (p.7) for the cable length chart to ensure correct cable size is purchased.

Dimensions and weights



MODEL	DN	DIMENSIONS(mm)			WEIGHTS (kg)		
1 ~220-240		P	M	T	P	M	T
3 SDM 2/ 8	1 ¼"	377	288	665	1.8	4.0	5.8
3 SDM 2 / 11	1 ¼"	444	308	752	2.1	4.8	6.9
3 SDM 2 / 15	1 ¼"	535	338	873	2.4	5.6	8.0
3 SDM 2 / 21	1 ¼"	694	368	1062	3.2	6.4	9.6
3 SDM 2 / 27	1 ¼"	830	408	1238	3.5	7.5	11.0
3 SDM 2 / 33	1 ¼"	966	448	1414	4.3	8.7	13.0
3 SDM 2 / 39	1 ¼"	1101	493	1594	4.9	10.0	14.9
3 SDM 2 / 47	1 ¼"	1306	543	1849	5.8	11.3	17.1

Installing a borehole pump and motor

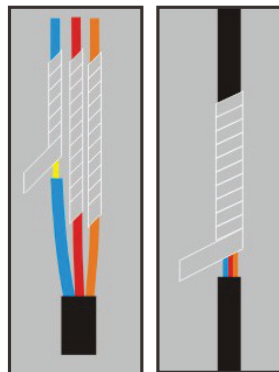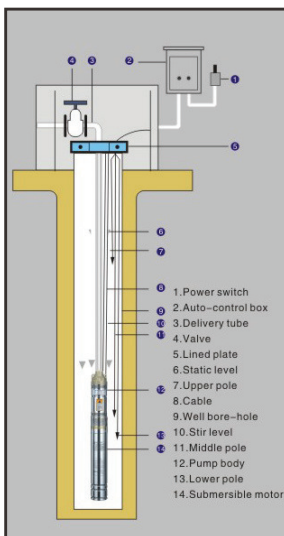

SINGLE PHASE 3" OIL FILLED BOREHOLE MOTOR CAPACITOR RATINGS		
kW	Capacitor (mF)	Running Amps
0.18	12	2.2
0.25	16	3.9
0.37	20	4.2
0.55	25	4.5
0.75	35	6
1.1	45	9
1.5	55	10.3
2.2	75	14.6

MAXIMUM CABLE LENGTH FROM PUMP TO STARTER

TYPE	kW	i _n (A)	1.5 mm ²	2.5 mm ²	4 mm ²	6 mm ²	10 mm ²
220V~/50H	0.18	2.2	171	290			
	0.25	3.9	122	207			
	0.37	4.2	111	185	295		
	0.55	4.5	80	133	211	315	
	0.75	6	58	96	153	229	377
	1.1	9	48	79	153	190	316
	1.5	10.3	34	57	92	137	228

Note: Unit c/w maximum 1.5mm 4 core cable.

However, it is not recommended for use for lengths longer than 60m.

For applications where longer distances are required it is advised to purchase the Version 1 kit. Refer to the 3" & 4" Borehole Catalogue (p.7) for the cable length chart to ensure correct cable size is purchased.