


# 4 SD 4

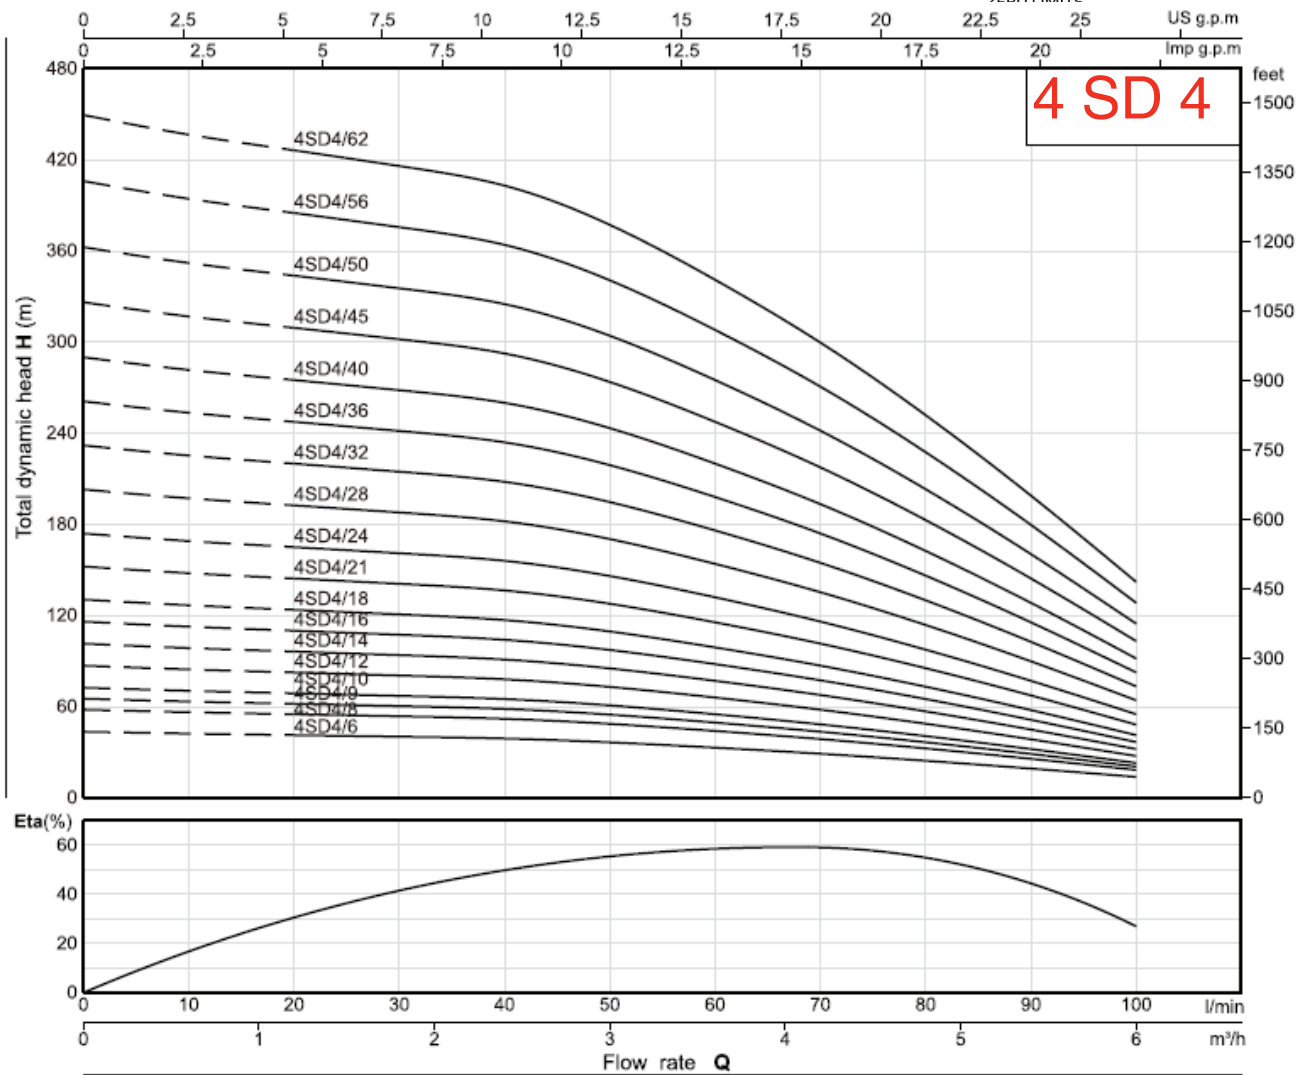

## Performance Data 50Hz

MODEL (50Hz)		P2		Delivery n≈2850 1/min											
1 - 220-240V	3 - 380 - 415V	kW	HP	m³/h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0
				l/min	0	10	20	30	40	50	60	70	80	90	100
4SDM4/6	4SD4/6	0.37	0.5	HEAD (m)	44	42	41	40	39	36	33	29	24	19	14
4SDM4/8	4SD4/8	0.55	0.75		58	56	55	54	52	49	44	39	33	26	18
4SDM4/9	4SD4/9	0.75	1		65	63	62	60	58	55	49	44	37	29	21
4SDM4/10	4SD4/10	0.75	1		73	70	69	67	65	61	55	48	41	32	23
4SDM4/12	4SD4/12	1.1	1.5		87	84	82	81	78	73	66	58	49	39	27
4SDM4/14	4SD4/14	1.1	1.5		102	98	96	94	91	85	77	68	57	45	32
4SDM4/16	4SD4/16	1.5	2		116	113	110	107	104	97	88	77	65	51	37
4SDM4/18	4SD4/18	1.5	2		131	127	124	121	117	109	99	87	73	58	41
4SDM4/21	4SD4/21	2.2	3		152	148	144	141	136	128	115	102	85	67	48
4SDM4/24	4SD4/24	2.2	3		174	169	165	161	156	146	132	116	98	77	55
-	4SD4/28	3	4		203	197	192	188	182	170	154	135	114	90	64
-	4SD4/32	3	4		232	225	220	215	208	195	176	155	130	103	73
-	4SD4/36	4	5.5		261	253	247	242	234	219	198	174	146	116	82
-	4SD4/40	4	5.5		290	281	275	268	260	243	220	194	163	128	92
-	4SD4/45	5.5	7.5		327	316	309	302	293	274	248	218	183	144	103
-	4SD4/50	5.5	7.5	363	352	344	335	325	304	275	242	203	160	115	
-	4SD4/56	7.5	10	406	394	385	376	364	341	308	271	228	180	128	
-	4SD4/62	7.5	10	450	436	426	416	403	377	341	300	252	199	142	